

18358 18359 18360 18361 KATALYST AIR SHOWER HEAD

### BEFORE YOU BEGIN


All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave these instructions for the consumer. They contain important information.


#### NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. Recommended working pressure: 1 to 5 bars.
3. The highest working pressure for showerhead is 0.5Mpa(5 bars). If it exceeds 0.5Mpa(5 bars), a pressure reducer is needed. The highest water and environment temperature is 60°C. Please keep spray away from heater, or maybe damage it and hurt user.


### ROUGH-IN DIMENSIONS

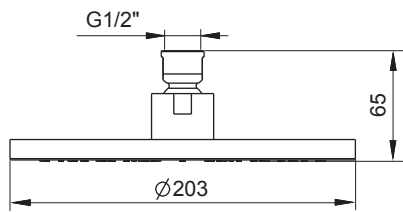


18358

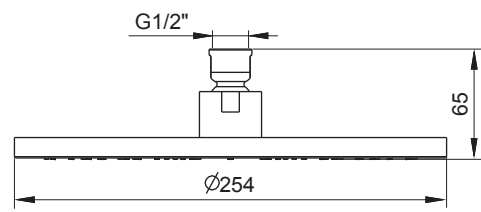

18359

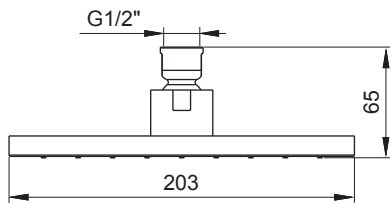


18360

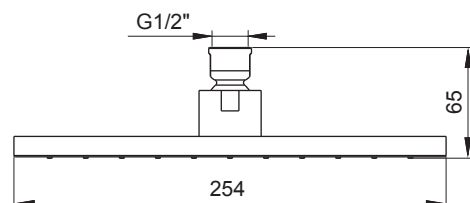

18361

### INSTALLATION

Flush both water supplies through the shower arm(2, not provided) for one minute before the showerhead(1) is installed. Apply tape or sealant to the exposed end of the shower arm. Tighten the showerhead with a strap wrench.




## CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.

## SERVICE PARTS

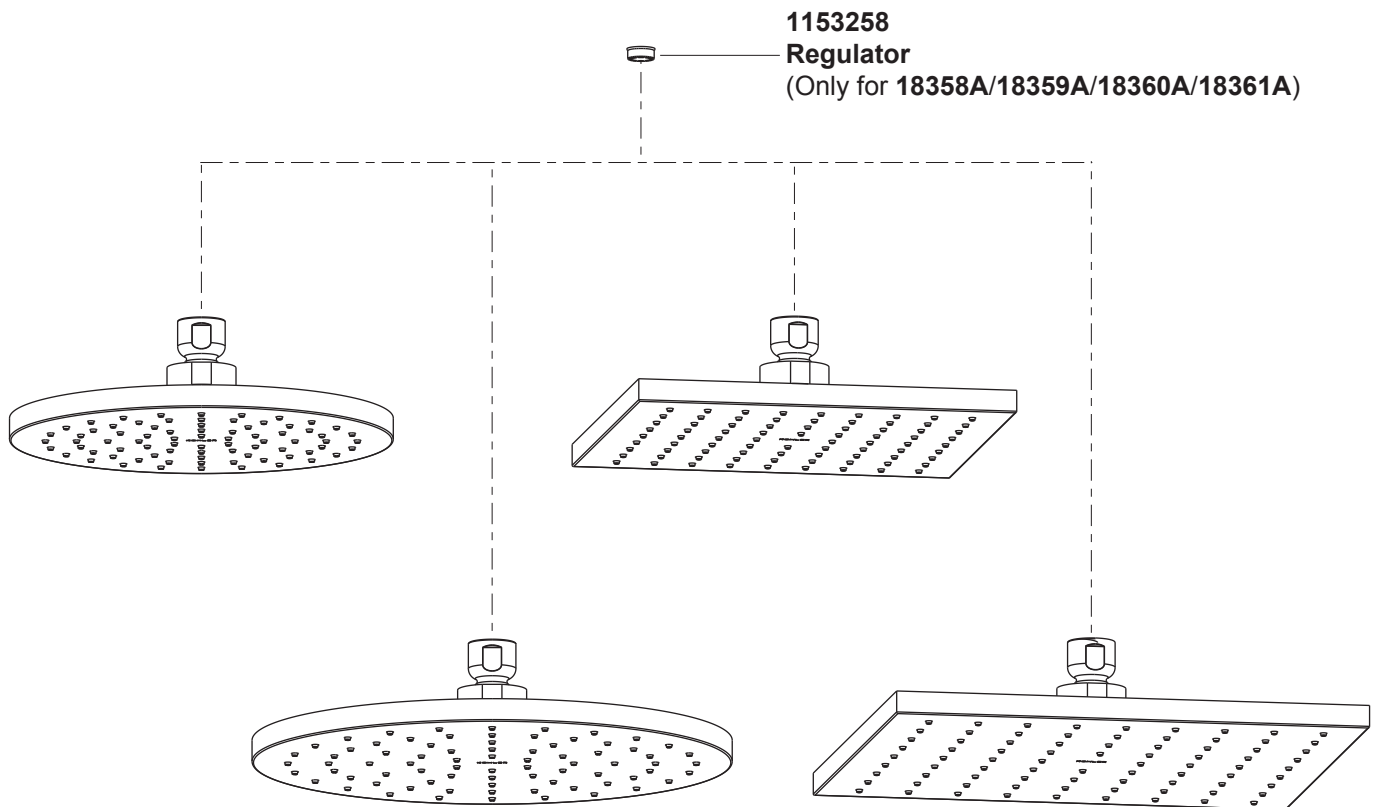

\*\*Color code must be specified when ordering