

10282 12008 14486 10114 444 457
10284 12009 14487 10117 37431
10115 11611 16344 16345 16358

PERFORMANCE SHOWERHEAD

BEFORE YOU BEGIN


All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave these instructions for the consumer. They contain important information.

NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. Recommended working pressure: 2 to 5 bar.
3. The highest working pressure for shower head is 0.5Mpa(5 bar). If it exceeds 0.5Mpa(5 bar), a pressure reducer is needed. The highest water and environment temperature is 60° C. Please keep shower head away from heater, or maybe damage it and hurt user.


ROUGH-IN DIMENSIONS

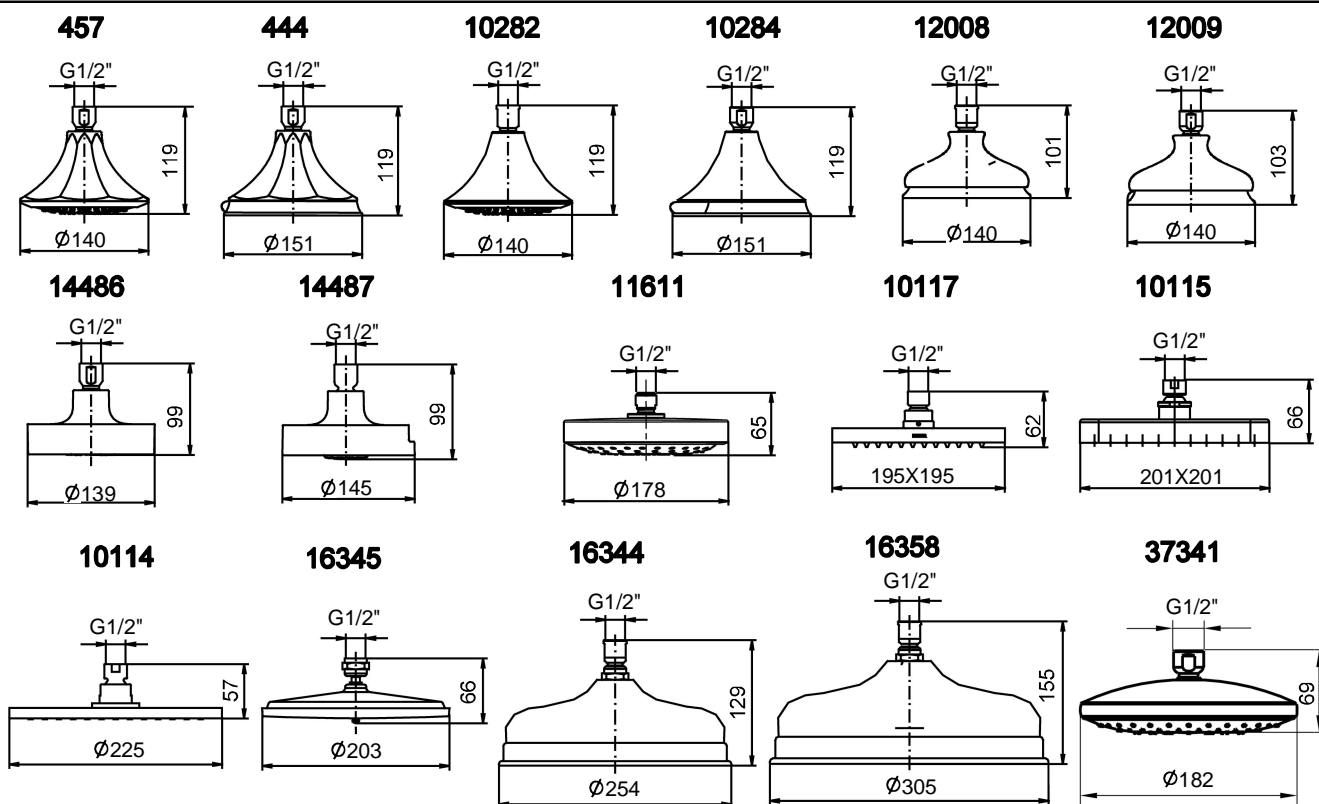


INSTALLATION

How To Install The Shower Head

Flush both water supplies through the shower arm(2, not provided) for one minute before the shower head(1) is installed. Apply tape or sealant to the exposed end of the shower arm. Tighten the shower head with a strap wrench.



Before installation, install restrictor(3) if needed. For 16344, 10115 and 16358 for Thailand & Australia, put the restrictor into the shower head as the figure shown. For 10114 and 10117 for Thailand, take out washer and install restrictor(3) as the figure shown, reinstall washer.




CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.

10282 12008 14486 10114 444 457
 10284 12009 14487 10117 37431
 10115 11611 16344 16345 16358

PERFORMANCE SHOWERHEAD

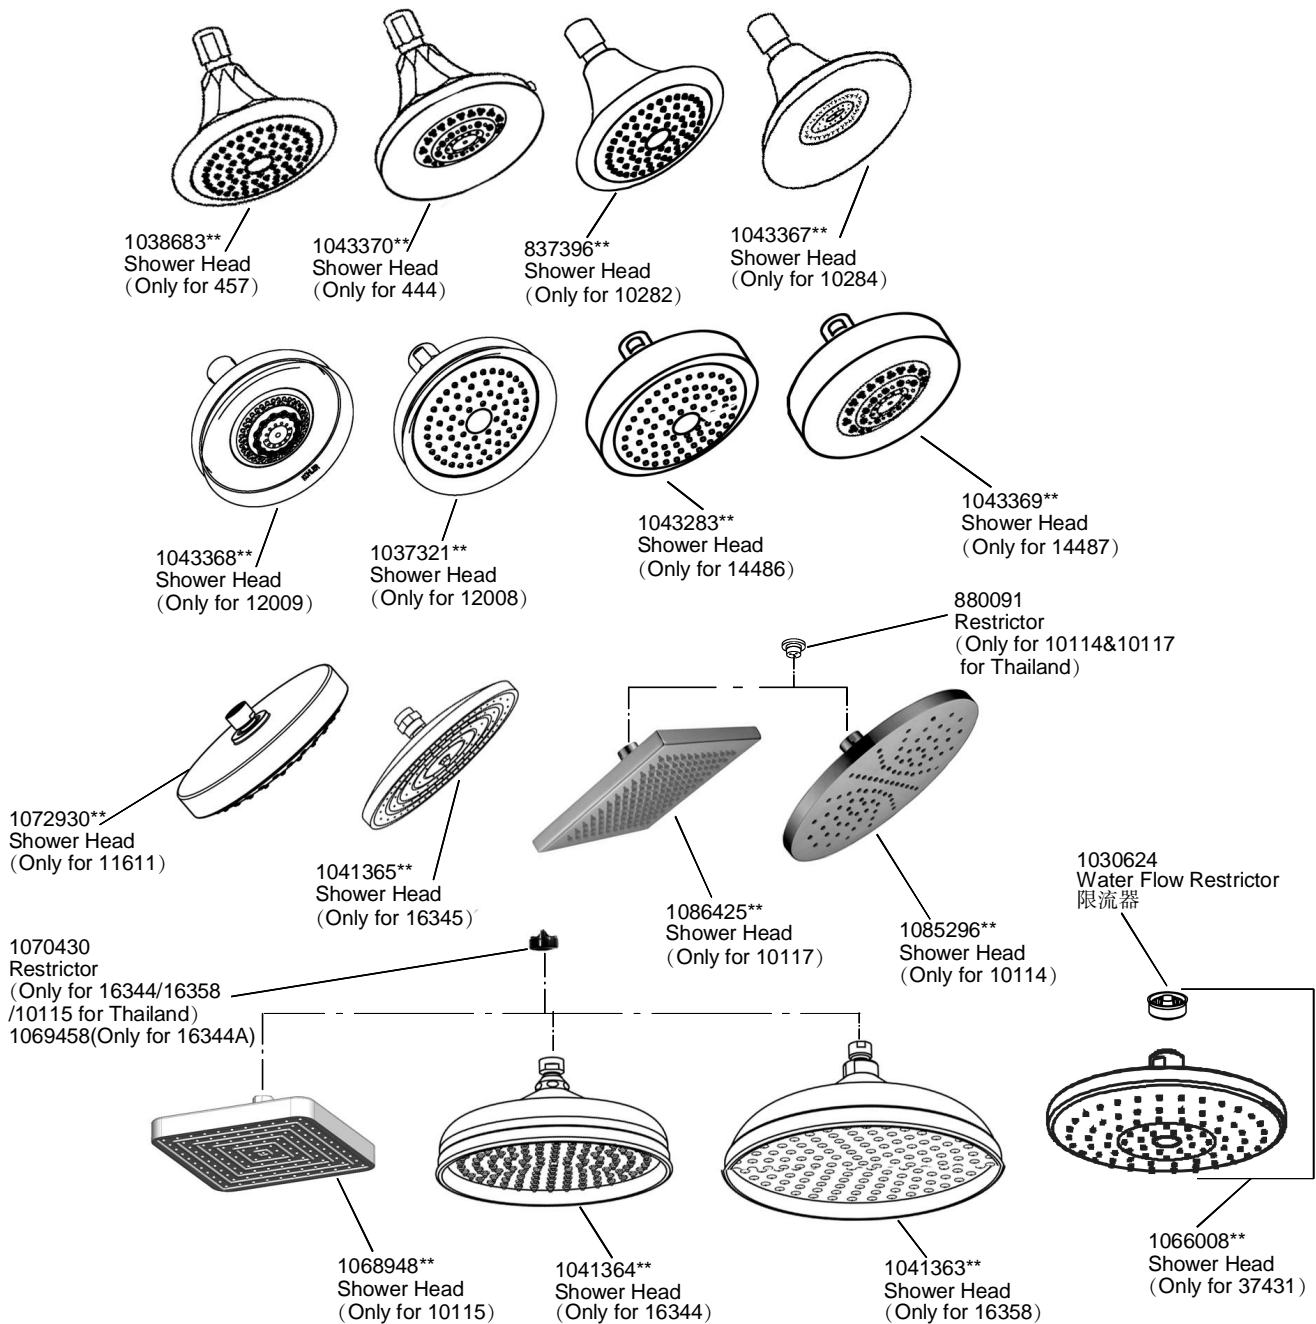

**Color code must be specified when ordering.